## **BASE ONLY** 580 MAIN INLET 1200 Ø600

OUTLET


PRODUCT CODE	MAIN CHANNEL PIPEWORK Ø (mm)	OPTIONAL SIDE INLETS (mm)	OVERALL DEPTH A (mm)	DIMENSION B (mm)	DIMENSION C (mm)	APPROX. WEIGHT (kg)
AIC600200B (Base Only)	200 spigot	2 x 150 twinwall	580	525	330	10
AIC600200B/1	200 spigot	2 x 150 twinwall	990	935	730	25
AIC600200B/1.5	200 spigot	2 x 150 twinwall	1510	1455	1250	34
AIC600200B/2	200 spigot	2 x 150 twinwall	1965	1910	1705	42
AIC600200B/2.4	200 spigot	2 x 150 twinwall	2355	2300	2095	49

## **RESTRICTION CAPS & DEBRIS COVERS**

NEW DESIGN & CONSTRUCTION GUIDANCE (DCG), HAS NOW EFFECTIVELY SUPERCEDED SfA7 (SEWERS FOR ADOPTION 7).

DCG STATES THAT ACCESS MUST BE RESTRICTED TO A MAXIMUM OF 350MM, ON ANY TYPE D OR E INSPECTION CHAMBER, DEEPER THAN 1000MM FROM COVER LEVEL TO SOFFIT OF PIPE.

OUR 600RCC - RESTRICTION CAP IS DESIGNED TO FIT OVER THE ACCESS SHAFT AND PROVIDE A Ø320MM ACCESS. ALTERNATIVELY CHAMBERS CAN BE SUPPLIED WITH OUR REDUCTION CAP - 600450RC, AS DETAILED BELOW. THIS ACCOMODATES EITHER OF THE TWO ACCESS COVERS - SQUARE SECTION 450ACSRA OR CIRCULAR 450ACCRA. BOTH HAVE THE REQUIRED RESTRICTED ACCESS TO Ø350MM AND THE LOADINGS ON BOTH COVERS IS A15 RATED.

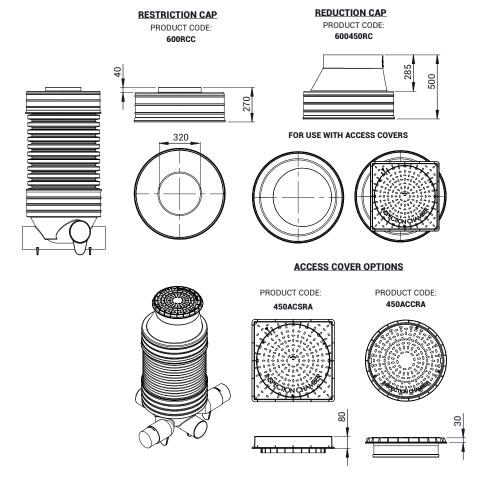

## PROPRIETARY & CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF TURTLE ENVIRO DRAINNOVATION ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF TURTLE ENVIRO IS PROHIBITED.





	DRAWN BY	CONTRACT							
	A.T								
	DRAWN DATE								
B	01/07/2021								
	-	PRODU( DESCRI							
	=	ORANGE RANGE - 600 SERIES							
•	APPROVED BY	PRODUCT/CODE							
S	D.A		AIC600200B						
	APPROVED DATE								

SHEET/SIZE A3

REV:

SCALE:

01/07/2021